




The All-New Fuji GW670II.
6 × 7 Format Camera.

FUJI GW670II

Professional

Ideal for Location, Group and Portrait Photography.

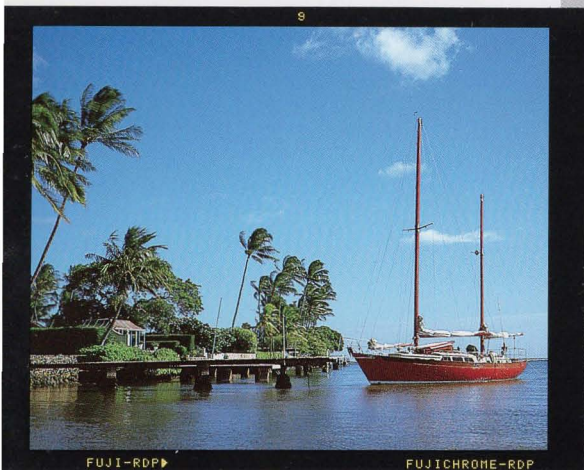

Self-cocking mechanism prevents double exposures.

Hot shoe allows no-code type small strobe.

Reliable, double-image coupled range viewfinder.

Two-stage shutter for smooth shots.

Shutter button lock mechanism prevents accidental exposures.

New hand grips give you stable, secure handling.

3-position strap for vertical, horizontal carrying.

Synchro-socket cap stops dirt and water.

Extension-contraction lens hood lets you prevent glare.

Simple additive total shutter shot counter.

Large, easy-to-read viewfinder.

The extra-large, 6 × 7 cm, easy-to-read viewfinder is ideal for the working professional who's business ranges from location photography to group photos to portraiture.

Parallax is automatically compensated for, depending on the distance from the subject being photographed. And focusing is carried out with an extremely high precision, double image interlocking mechanism.

Reliable EBC Fujinon 90 mm 1:3.5 lens.

Fujinon lenses have a well-deserved reputation for quality. This lens is no exception. It has a reputation among professional photographers for its sharpness and excellent color balance.

Outstanding features of the lens shutter.

High speed synchronization with strobe allows a wide range of strobe effects to be performed, including synchronized lighting in back-lit situations. It also

provides excellent balance with natural light and outstanding tone in the final results.

Light-touch self-cocking shutter.

With a smooth, 2-stroke film advance, the shutter charger is simultaneously completed. The self-cocking mechanism prevents double exposures and promotes simple operation. And thanks to the Fuji GW670II's light-touch shutter release button and smooth shutter, pictures can be taken without worrying about annoying blurring.

GW670II SPECIFICATIONS

Picture size:	6 × 7 cm. Actual picture size measures 56 × 68.5 mm.	Lens.	EBC Fujinon 90 mm f/3.5, 5 elements 5 components. 52° angle of view (diagonal line). (equivalent to 35 mm, f = 44 mm.) Filter radius 67φ mm, p = 0.75. Minimum photographic distance: 1 m, Minimum aperture: f/32, extension-contraction lens hood (in lens body).	Measurements.	120 mm(H) × 200 mm(W) × 128 mm(D) (with hood installed).
Film sizes	120 half-roll film. 5 frames, 120 roll film. 10 frames, 220 roll film. 20 frames.	Distance meter	Double-image, coupled range-viewfinder	Weight.	1,445 grams.
Film advance:	Lever on camera top, 2-stroke advance (1st stroke 138°, 2nd stroke depends on film roll diameter), self-cocking shutter. Double exposure prevention.	Finder	Magnification. 0.75. Range: 1 m. 95%, ∞ 92%. Base length. 59 mm (effective base length. 44.3 mm). Auto parallax compensation.	Others	Shutter shot counter included. 120/220 changing method, includes film indicator pocket on back cover strap attachment. three locations for vertical, horizontal carrying.
Film Counter	Automatic reset additive type: 120 1/2-120-220 changing method.			Accessories.	Soft case, strap, eye cup.
Shutter	#0 mechanical lens shutter. T 1 1/500 sec. X-contact hot shoe and synchro-socket included. Two-position shutter with shutter button locking mechanism.				



FUJI PHOTO FILM CO., LTD.
26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN