




INSTRUCTIONS FOR THE REMOTE CAMERA BATTERY PACK E

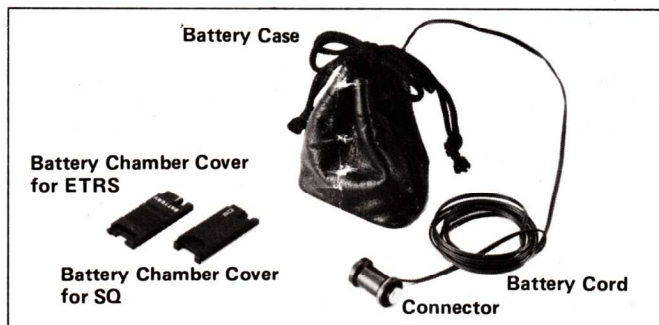

The Remote Camera Battery Pack has been developed for maintaining optimum performance of the battery in freezing weather.

Either an alkaline-manganese or silver oxide battery can be used in the Zenza Bronica ETRS and SQ single lens reflexes. Although these batteries have good cold weather resistance, there is still a tendency for performance to drop when used in temperatures below 0°C (32°F). For use at such cold temperatures, therefore, it is recommended that a fresh battery always be used and that the camera also be protected from the freezing weather, with the Remote Camera Battery Pack E used for protecting the battery.


The Remote Camera Battery Pack E has been developed so that the battery can be taken out of the camera and used while stored safely in the coat pocket or next to the user's body for additional warmth, thus providing optimum performance even when shooting in freezing weather.

In addition to the ETRS and SQ cameras, the Remote Camera Battery Pack E can also be used with the Zenza Bronica EC, EC-TL and EC-TLII models.

HOW TO USE

HOW TO USE (ETRS and ETR C)



- ① Remove the battery chamber cover of the camera body and take out the battery. (See "Loading the Battery" of the instruction manual.)

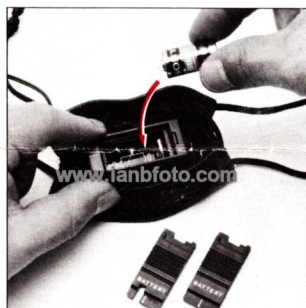


- ② Take off the battery chamber cover from the battery case inside the Pack. Insert the battery from the camera into the case, with polarity marks properly coincided. Use the camera's battery chamber cover to close the battery case inside the Pack.



- ③ Insert the connector from the Pack into the battery chamber of the camera, with polarity marks properly coincided. Then, use the battery chamber cover of the Pack (with cutout for passing the cord) to close the battery chamber.

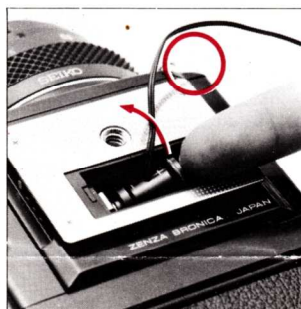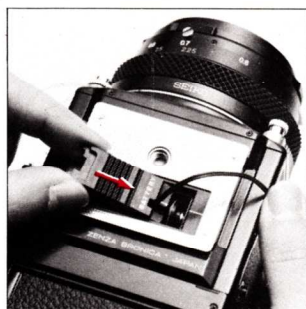

- ④ Remove the connector from the battery chamber in the same manner as the battery, or use your fingernail and do not pull on the cord.

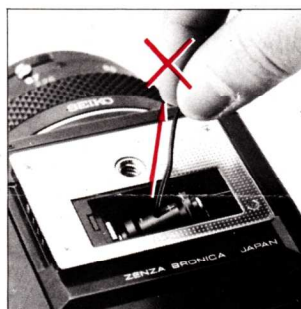

- ⑤ Use the Tripod Mounting Shoe Cover on the tripod mounting shoe, with the cord exiting through the cutout in the Cover, when mounting the camera on the tripod while connected to the Remote Camera Battery Pack.

NOTE:


The Tripod Mounting Shoe Cover is supplied with the camera. However, if you cannot find your Cover, please contact the distributor or our export department.



- ⑥ SQ battery chamber cover (marked SQ in orange) supplied with the Pack is for the SQ camera only and should not be used on the ETRS.

HOW TO USE (SQ)



- ① Remove the battery chamber cover from the SQ and take out the battery.
(See "Loading the Battery" of the SQ instruction manual.)
- ② Load the battery from the SQ into the battery case of the Pack, with polarity marks properly coincided.

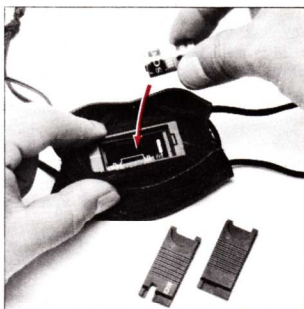

- ③ Insert the connector from the Pack into the battery chamber of the SQ, with the polarity marks properly coincided. Then, use the battery chamber cover supplied with the Pack (with orange-colored SQ mark) to close the battery case.



- ④ Remove the connector from the battery chamber in the same manner as the battery. In other words, use your fingernail and never pull on the cord.

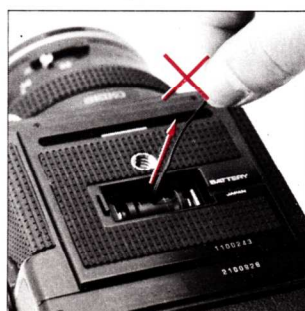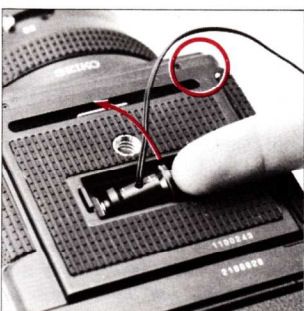


- ⑤ For mounting the SQ on the tripod while connected to the Remote Camera Battery Pack, run the battery cord from the Pack through a groove on the film back side of the word BATTERY, on the base of camera body, which will protect it.

- ⑥ The battery chamber cover taken off the SQ is not used, in this case.

HOW TO USE (EC, EC-TL and EC-TLII)

- ① Remove the battery chamber cover of the camera and take out the battery.
- ② Insert the battery from the camera into the battery case of the Pack, after removing its cover. Be sure to coincide the polarity marks, when loading the battery. Next, replace the cover.

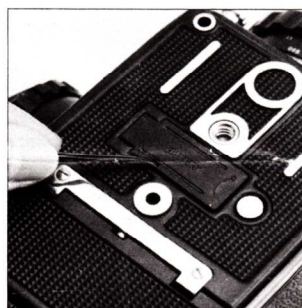

- ③ Insert the connector from the Pack into the battery chamber of the camera, with polarity marks properly coincided. The cord should be passed out through the cutout of the camera's battery chamber cover.

- ④ The connector should be removed from the battery chamber in the same manner as the battery. In other words, use your fingernail and do not pull on the cord.
- ⑤ The SQ battery chamber cover, supplied with the Pack, is not for use with the EC, EC-TL and EC-TLII cameras.

HOW TO USE (Other Brand Cameras)

The Remote Camera Battery Pack E can be used with non-Bronica cameras which used a 6 volt alkaline-manganese or silver oxide battery for power, if it is possible to exit the battery cord safely from the battery chamber.

BRONICA CO., LTD.

Futaba Bldg., 2-2 Shin-Ogawamachi, Shinjuku-ku,
Tokyo 162, Japan

Tel: (03) 267-0211

Telex: 0232-2096 BRONC J

Cable: BRONICA TOKYO