



FUJICA GW690/GSW690

Professional

Professional

The Maneuverable 6 x 9


Light Weight and Compact —
A Large Format Camera Has Never Been Easier to Use



The Big Camera You Can Carry Along

The Fujica GW690 Professional and the Fujica GSW690 Professional combine the obvious advantages of the larger negative with compact maneuverability. Designed for the working photographer, they are solidly crafted tools light enough to go anywhere.

The Fujica GW690 features a standard wide $f = 90\text{mm}$ F3.5 EBC Fujinon lens; while the GSW690 comes with a super-wide angle $f = 65\text{mm}$ F5.6 EBC Fujinon lens. Both lenses are firmly attached to the body and have Electron Beam Coating, an exclusive Fuji process that guarantees sharper pictures.

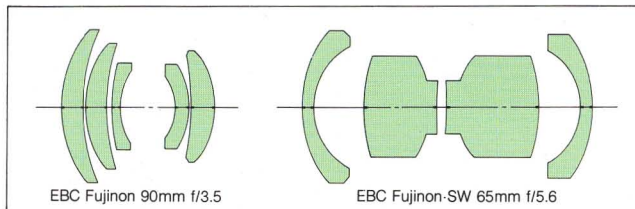

Both cameras are equipped with two shutter buttons, preventing camera shake during both vertical and horizontal shooting. The lever-type film winder turns through a two-step winding operation, the first moving through 138° and the second adjusting automatically to the film size. The built-in range finder provides a bright view. Easy to adjust, it makes rapid shooting for dynamic pictures a sure thing.



FUJICA GW690/GSW690 SPECIFICATIONS

	GW690	GSW690
Picture size	6 x 9cm	6 x 9cm
Film sizes	120 half-roll (4 exp.) 120 roll (8 exp.) 220 roll (16 exp.)	
Film winding	Two-step winding operation, the first advances moves through 138° , the second adjusts automatically to film size	
Film counter	Automatic reset frame counter	
Shutter	#0 lens shutter T. 1 to 1/500 sec.	
Lens	EBC Fujinon 90mm f/3.5 5 compositions, 5 elements Not interchangeable Min. focus = 1 m. Min. aperture: F32 Filter radius: 70 ϕ Screw radius: 67 ϕ P=0.75 Angle of view: 58° (equiv. 35mm $f = 39\text{mm}$)	EBC Fujinon-SW 65mm f/5.6 4 compositions, 6 elements Not interchangeable Min. focus = 1 m. Min. aperture: F32 Filter radius: 70 ϕ Screw radius: 67 ϕ P=0.75 Angle of view: 76° (equiv. 35mm $f = 28\text{mm}$)
Finder	Double-image super-imposing rangefinder	
	Magnification: 0.75 Visibility ratio 1m: 95% ∞ : 92%	Magnification: 0.45 Visibility ratio 1m: 93% ∞ : 90%
	Base length 59mm (Effective base length 44.3mm)	Base length 59mm (Effective base length 26.6mm)
Dimensions	119(H) x 189(W) x 123(D) mm	119(H) x 189(W) x 129(D) mm
Weight	1,430 g	1,475 g
Other	Shutter shot counter	



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN.